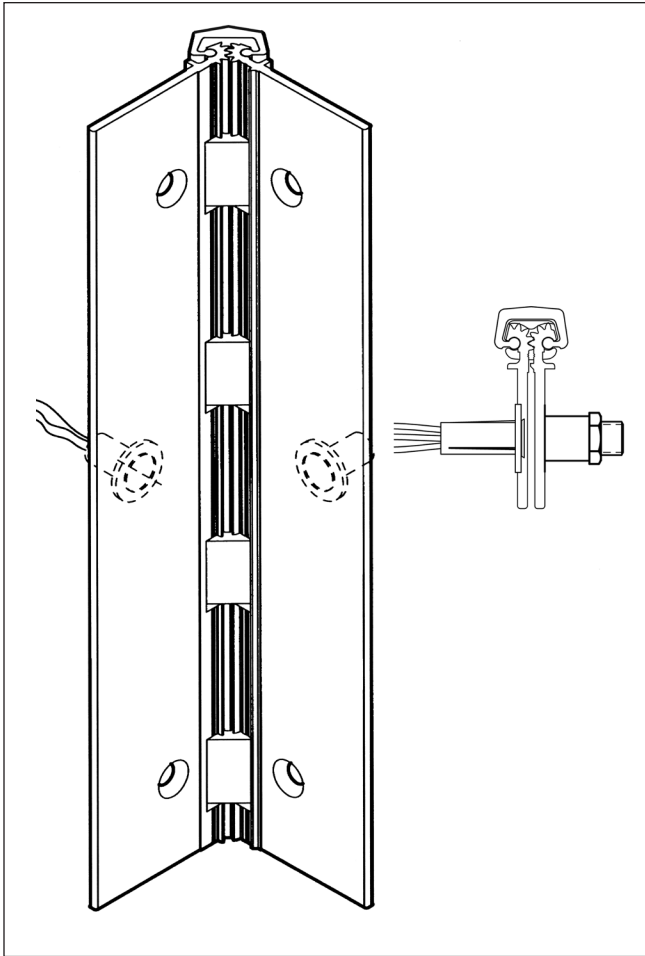


CMG/DPS (Concealed Magnetic Door Position Switch)

PREP: SELECT geared continuous hinges can be prepared for a concealed magnetic door position monitor switch to provide non-continuous current. 22 gauge wire with 14" leads. 28V DC. Wire color continuity (Green & Red while closed, Green & White while open).

LOCATION: Specify the dimension from the top of the hinge to the centerline of the CMG/DPS. Avoid putting the CMG/DPS within one inch of a fastener hole. Hinge is installed flush with the top of the door.

Refer to the templates in the Concealed Geared Hinge section to choose appropriate CMG/DPS location. These templates are also available online at www.SelectHinges.com.

HANDING: Specify the handing of each door requiring the CMG/DPS.

ORDER: Use suffix "CMG/DPS," plus the location and handing. Only one CMG/DPS is required per monitoring hinge.

Example: SL24 HD600 83" Clear CMG/DPS 36" from top of hinge to centerline, RH.

AVAILABILITY: Available on geared hinge models SL11, SL12, SL14, SL18, SL24, SL26, SL27, SL31, SL40, SL41, SL44, SL48 and SL84.

LEAD TIME: 48 hours (on most orders).

WARRANTY: 5 years on electrical modification components.

IMPORTANT: SELECT Products Limited does not recommend preparing door and frame for CMG/DPS before receipt of hinge. If door and frame must be prepared before receipt of hinge, contact factory for special template.