





SL11 85" HD300

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.


Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

NOTE: All unspecified angles default to 90°. To avoid an upcharge, 180° openings must be clearly specified at the time of order. There will be an upcharge for 180° ATW cover plates when ordered separately and finish (Clear, Bronze or Black) must be specified.

SL11 Profile

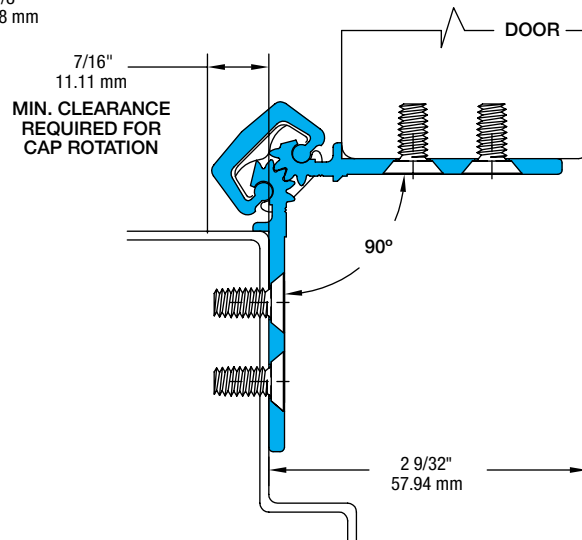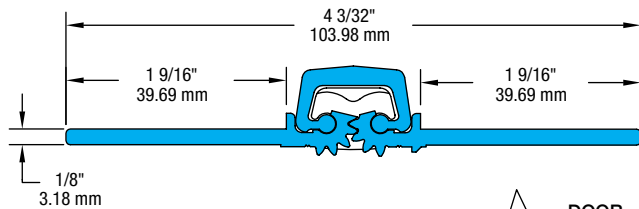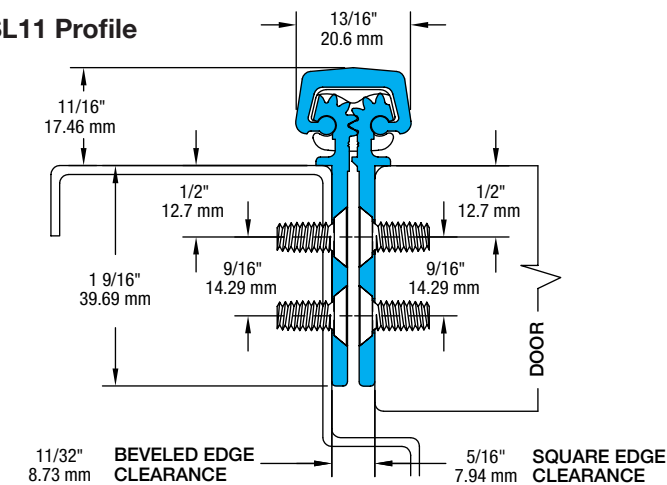

A 3/4" (19mm) clearance hole is required in the door and frame for the ATW wires.



4-pin and/or 8-pin connectors are supplied at the end of the 8" (203.2mm) lead.

38 fasteners / 16 bearings

HOLES	ATW LOCATIONS
1 1/2 [38.1]	0 [0.0]
3 1/2 [88.9]	
5 1/2 [139.7]	
	7 29/32 [200.8]
10 [254.0]	
	13 1/32 [331.0]
	15 19/32 [396.1]
	18 5/32 [461.2]
20 [508.0]	
	23 9/32 [591.3]
	25 27/32 [656.4]
	28 13/32 [721.5]
30 [762.0]	
	33 17/32 [851.7]
	36 3/32 [916.8]
	38 21/32 [981.9]
42 1/2 [1079.5]	
	46 11/32 [1177.1]
	48 29/32 [1242.2]
	51 15/32 [1307.3]
55 [1397.0]	
	56 19/32 [1437.5]
	59 5/32 [1502.6]
	61 23/32 [1567.7]
65 [1651.0]	
	66 27/32 [1697.8]
	69 13/32 [1762.9]
	71 31/32 [1828.0]
75 [1905.0]	
	77 3/32 [1958.2]
79 1/2 [2019.3]	
81 1/2 [2070.1]	
83 1/2 [2120.9]	
	85 [2159.0]