


SL18 83" HD300

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

NOTE: All unspecified angles default to 90°. To avoid an upcharge, 180° openings must be clearly specified at the time of order. There will be an upcharge for 180° ATW cover plates when ordered separately and finish (Clear, Bronze or Black) must be specified.

SL18 Profile

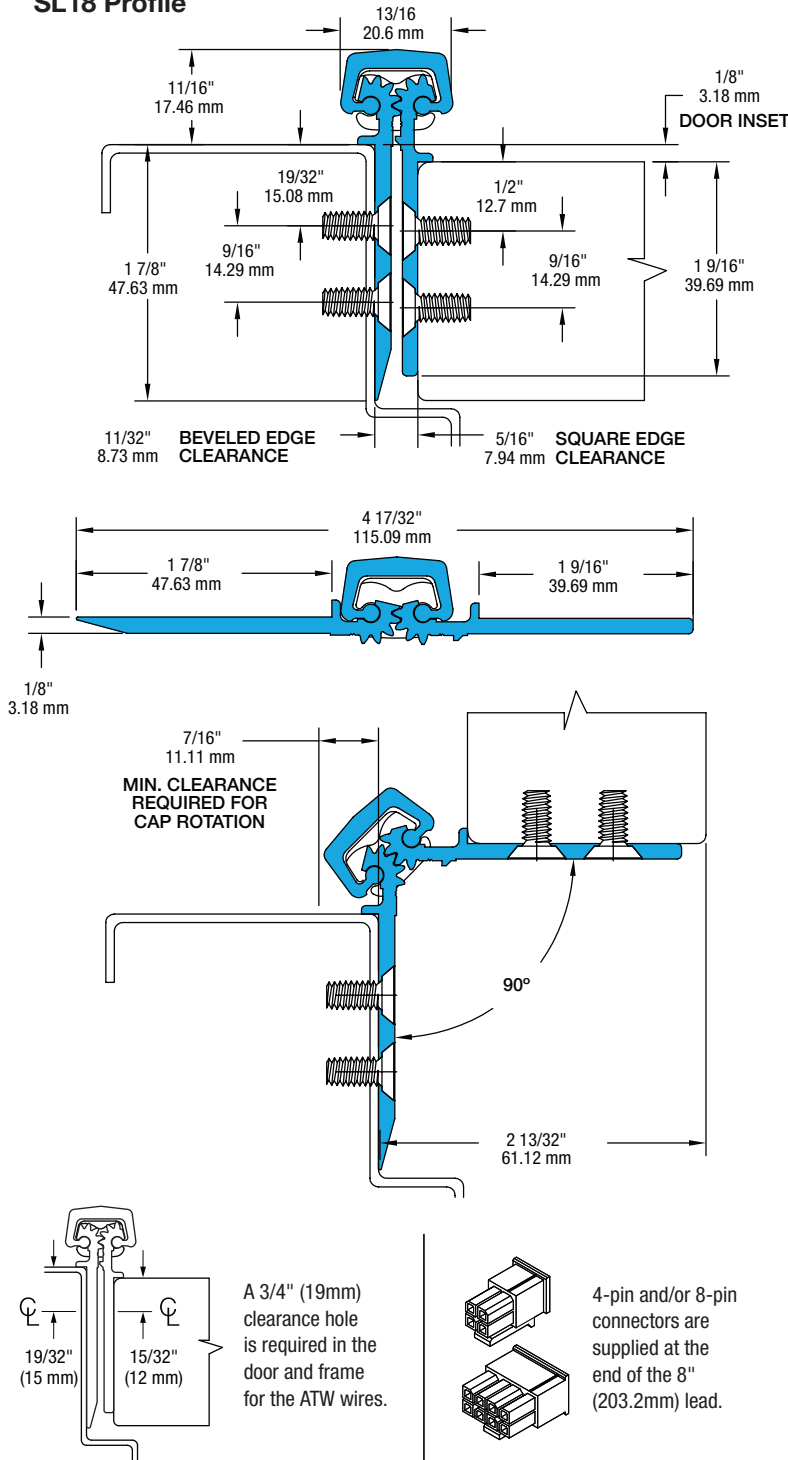

38 fasteners / 16 bearings

HOLES	ATW LOCATIONS
1 1/2 [38.1]	— 0 [.0]
3 1/2 [88.9]	— 12 1/32 [305.6]
5 1/2 [139.7]	— 14 19/32 [370.7]
	— 17 5/32 [435.8]
10 [254.0]	— 22 9/32 [565.9]
	— 24 27/32 [631.0]
20 [508.0]	— 27 13/32 [696.1]
	— 32 17/32 [826.3]
30 [762.0]	— 35 3/32 [891.4]
	— 37 21/32 [956.5]
41 1/2 [1054.1]	— 45 11/32 [1151.7]
	— 47 29/32 [1216.8]
	— 50 15/32 [1281.9]
53 [1346.2]	— 55 19/32 [1412.1]
	— 58 5/32 [1477.2]
	— 60 23/32 [1542.3]
63 [1600.2]	— 65 27/32 [1672.4]
	— 68 13/32 [1737.5]
	— 70 31/32 [1802.6]
73 [1854.2]	
77 1/2 [1968.5]	
79 1/2 [2019.3]	
81 1/2 [2070.1]	
	— 83 [2108.2]