


## SL18 83" LL

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

**NOTE:** All unspecified angles default to 90°. To avoid an upcharge, 180° openings must be clearly specified at the time of order. There will be an upcharge for 180° ATW cover plates when ordered separately and finish (Clear, Bronze or Black) must be specified.

### SL18 Profile

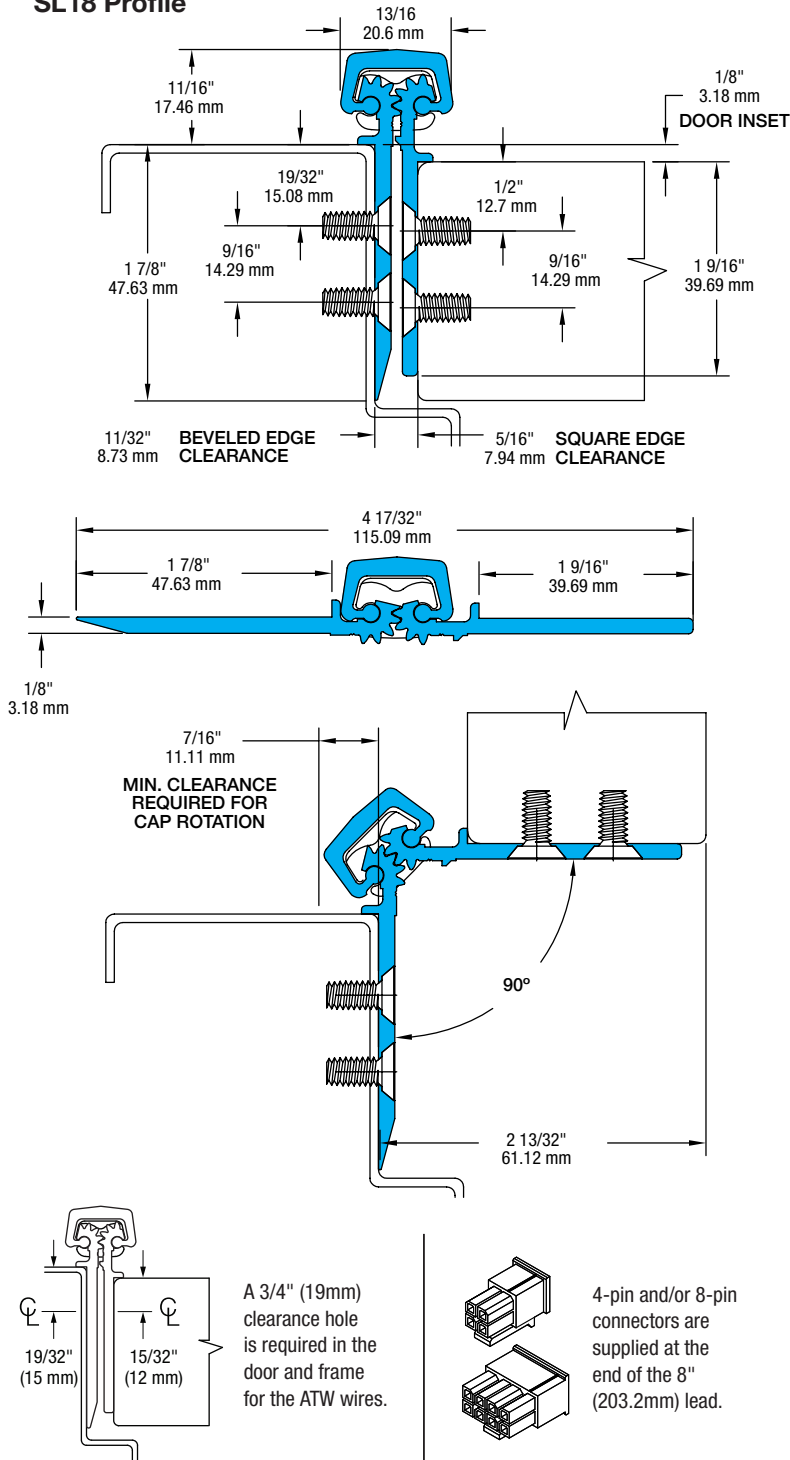

### 52 fasteners / 32 bearings

| HOLES           | ATW LOCATIONS     |
|-----------------|-------------------|
| 1 1/2 [38.1]    | 0 [0]             |
| 3 1/2 [88.9]    |                   |
| 5 1/2 [139.7]   |                   |
|                 | 8 3/16 [208.0]    |
| 10 [254.0]      |                   |
|                 | 13 5/16 [338.1]   |
|                 | 15 7/8 [403.2]    |
|                 | 18 7/16 [468.3]   |
| 20 [508.0]      |                   |
|                 | 23 9/16 [598.5]   |
|                 | 26 1/8 [663.6]    |
| 30 [762.0]      |                   |
|                 | 33 13/16 [858.8]  |
|                 | 36 3/8 [923.9]    |
|                 | 38 15/16 [989.0]  |
| 41 1/2 [1054.1] |                   |
|                 | 44 1/16 [1119.2]  |
|                 | 46 5/8 [1184.3]   |
|                 | 49 3/16 [1249.4]  |
| 53 [1346.2]     |                   |
|                 | 56 7/8 [1444.6]   |
|                 | 59 7/16 [1509.7]  |
| 63 [1600.2]     |                   |
|                 | 64 9/16 [1639.9]  |
|                 | 67 1/8 [1705.0]   |
|                 | 69 11/16 [1770.1] |
| 73 [1854.2]     |                   |
|                 | 74 13/16 [1900.2] |
| 77 1/2 [1968.5] |                   |
| 79 1/2 [2019.3] |                   |
| 81 1/2 [2070.1] |                   |
|                 | 83 [2108.2]       |


## SL18 85" HD300

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

**NOTE:** All unspecified angles default to 90°. To avoid an upcharge, 180° openings must be clearly specified at the time of order. There will be an upcharge for 180° ATW cover plates when ordered separately and finish (Clear, Bronze or Black) must be specified.

### SL18 Profile

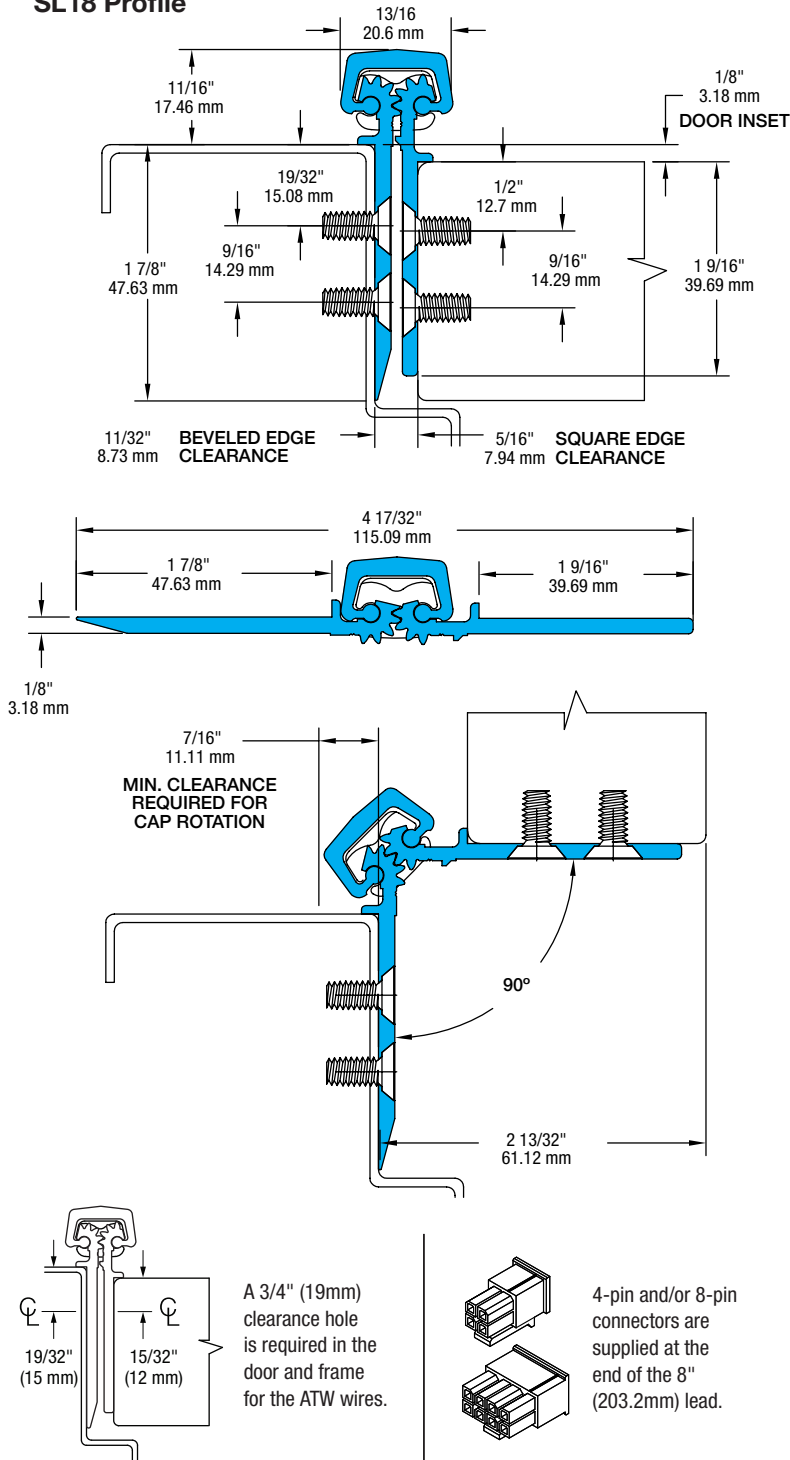

### 38 fasteners / 16 bearings

| HOLES           | ATW LOCATIONS     |
|-----------------|-------------------|
| 1 1/2 [38.1]    | 0 [0]             |
| 3 1/2 [88.9]    |                   |
| 5 1/2 [139.7]   |                   |
|                 | 7 29/32 [200.8]   |
| 10 [254.0]      | 13 1/32 [331.0]   |
|                 | 15 19/32 [396.1]  |
|                 | 18 5/32 [461.2]   |
| 20 [508.0]      | 23 9/32 [591.3]   |
|                 | 25 27/32 [656.4]  |
|                 | 28 13/32 [721.5]  |
| 30 [762.0]      | 33 17/32 [851.7]  |
|                 | 36 3/32 [916.8]   |
|                 | 38 21/32 [981.9]  |
| 42 1/2 [1079.5] | 46 11/32 [1177.1] |
|                 | 48 29/32 [1242.2] |
|                 | 51 15/32 [1307.3] |
| 55 [1397.0]     | 56 19/32 [1437.5] |
|                 | 59 5/32 [1502.6]  |
|                 | 61 23/32 [1567.7] |
| 65 [1651.0]     | 66 27/32 [1697.8] |
|                 | 69 13/32 [1762.9] |
|                 | 71 31/32 [1828.0] |
| 75 [1905.0]     | 77 3/32 [1958.2]  |
| 79 1/2 [2019.3] |                   |
| 81 1/2 [2070.1] |                   |
| 83 1/2 [2120.9] |                   |
|                 | 85 [2159.0]       |