


SL26 85" LL

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

NOTE: All unspecified angles default to 90°. To avoid an upcharge, 180° openings must be clearly specified at the time of order. There will be an upcharge for 180° ATW cover plates when ordered separately and finish (Clear, Bronze or Black) must be specified.

SL26 Profile

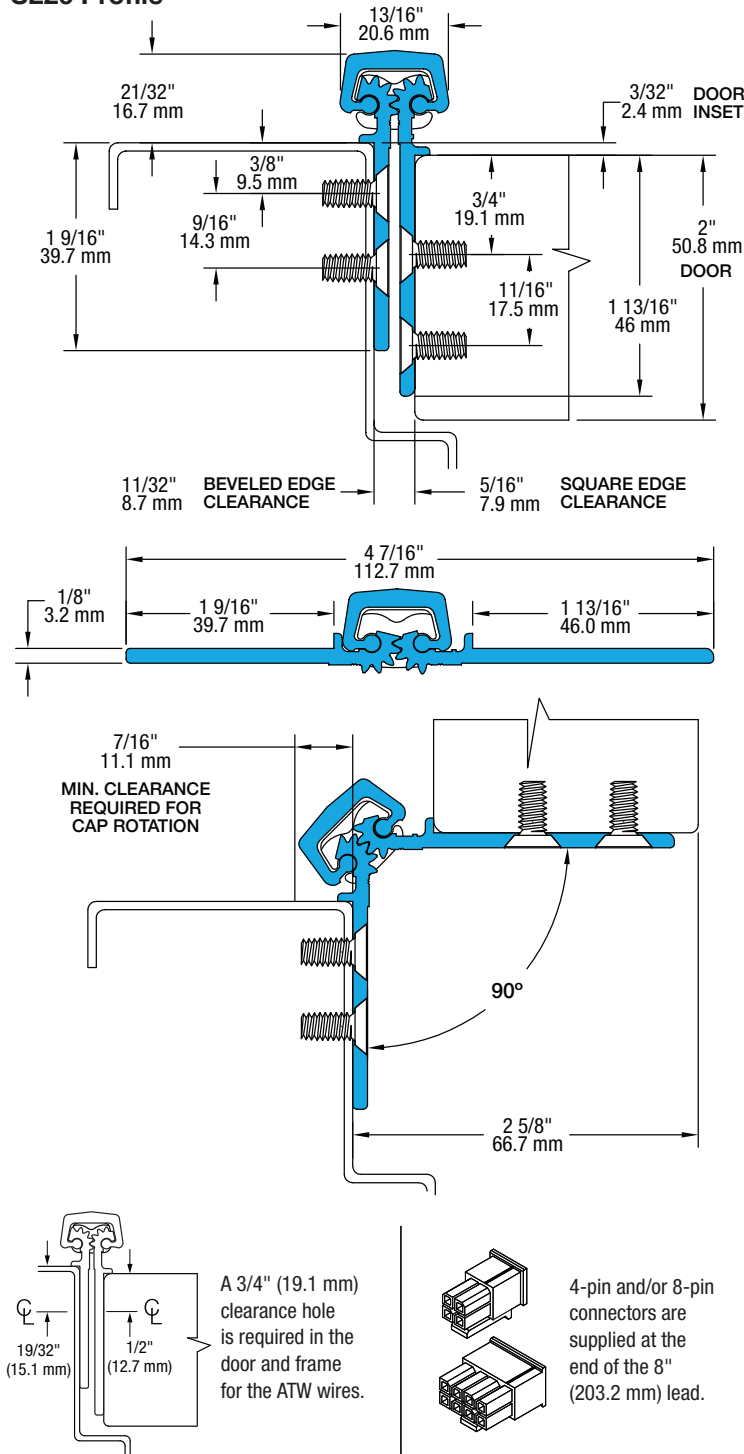

52 fasteners / 32 bearings

HOLES	ATW LOCATIONS
1 1/2 [38.1]	0 [0.0]
3 1/2 [88.9]	
5 1/2 [139.7]	
10 [254.0]	
15 [381.0]	11 3/4 [298.5]
20 [508.0]	16 7/8 [428.6]
25 [635.0]	22 [558.8]
30 [762.0]	27 1/8 [689.0]
35 [889.0]	32 1/4 [819.2]
	37 3/8 [949.3]
	39 15/16 [1014.4]
42 1/2 [1079.5]	
	45 1/16 [1144.6]
	47 5/8 [1209.7]
50 [1270.0]	
55 [1397.0]	52 3/4 [1339.9]
60 [1524.0]	57 7/8 [1470.0]
65 [1651.0]	63 [1600.2]
70 [1778.0]	68 1/8 [1730.4]
75 [1905.0]	73 1/4 [1860.6]
79 1/2 [2019.3]	
81 1/2 [2070.1]	
83 1/2 [2120.9]	
	85 [2159.0]