


SL26 95" LL

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

NOTE: All unspecified angles default to 90°. To avoid an upcharge, 180° openings must be clearly specified at the time of order. There will be an upcharge for 180° ATW cover plates when ordered separately and finish (Clear, Bronze or Black) must be specified.

SL26 Profile

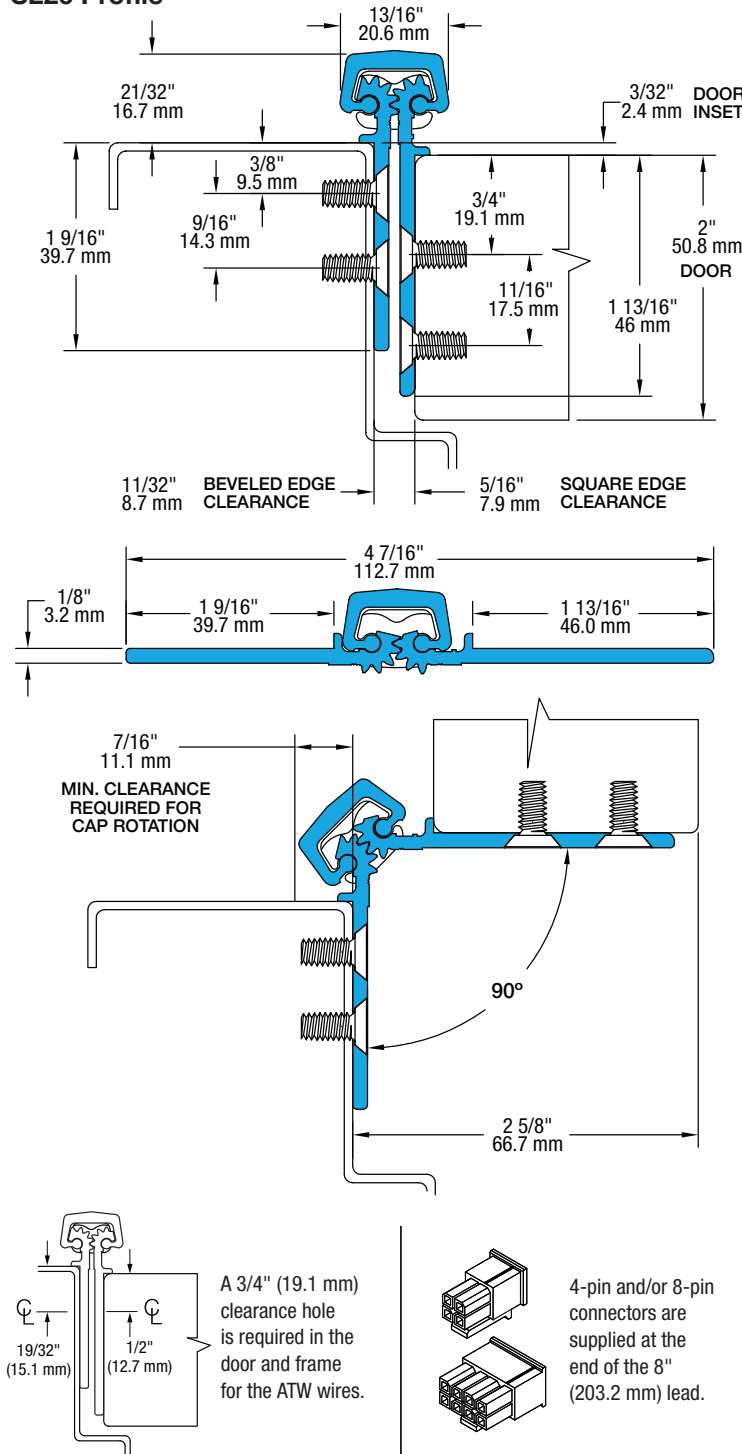

58 fasteners / 36 bearings

HOLES	ATW LOCATIONS
1 1/2 [38.1]	0 [0]
3 1/2 [88.9]	
5 1/2 [139.7]	
10 [254.0]	
15 [381.0]	11 5/8 [295.3]
20 [508.0]	16 3/4 [425.5]
25 [635.0]	21 7/8 [555.6]
30 [762.0]	27 [685.8]
35 [889.0]	32 1/8 [816.0]
40 [1016.0]	37 1/4 [946.2]
43 3/4 [1111.3]	
47 1/2 [1206.5]	
51 1/4 [1301.8]	
55 [1397.0]	57 3/4 [1466.9]
60 [1524.0]	62 7/8 [1597.0]
65 [1651.0]	68 [1727.2]
70 [1778.0]	73 1/8 [1857.4]
75 [1905.0]	78 1/4 [1987.6]
80 [2032.0]	83 3/8 [2117.7]
85 [2159.0]	
89 1/2 [2273.3]	
91 1/2 [2324.1]	
93 1/2 [2374.9]	
	95 [2413.0]