


SL48 83" HD600

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

NOTE: All unspecified angles default to 90°. To avoid an upcharge, 180° openings must be clearly specified at the time of order. There will be an upcharge for 180° ATW cover plates when ordered separately and finish (Clear, Bronze or Black) must be specified.

SL48 Profile

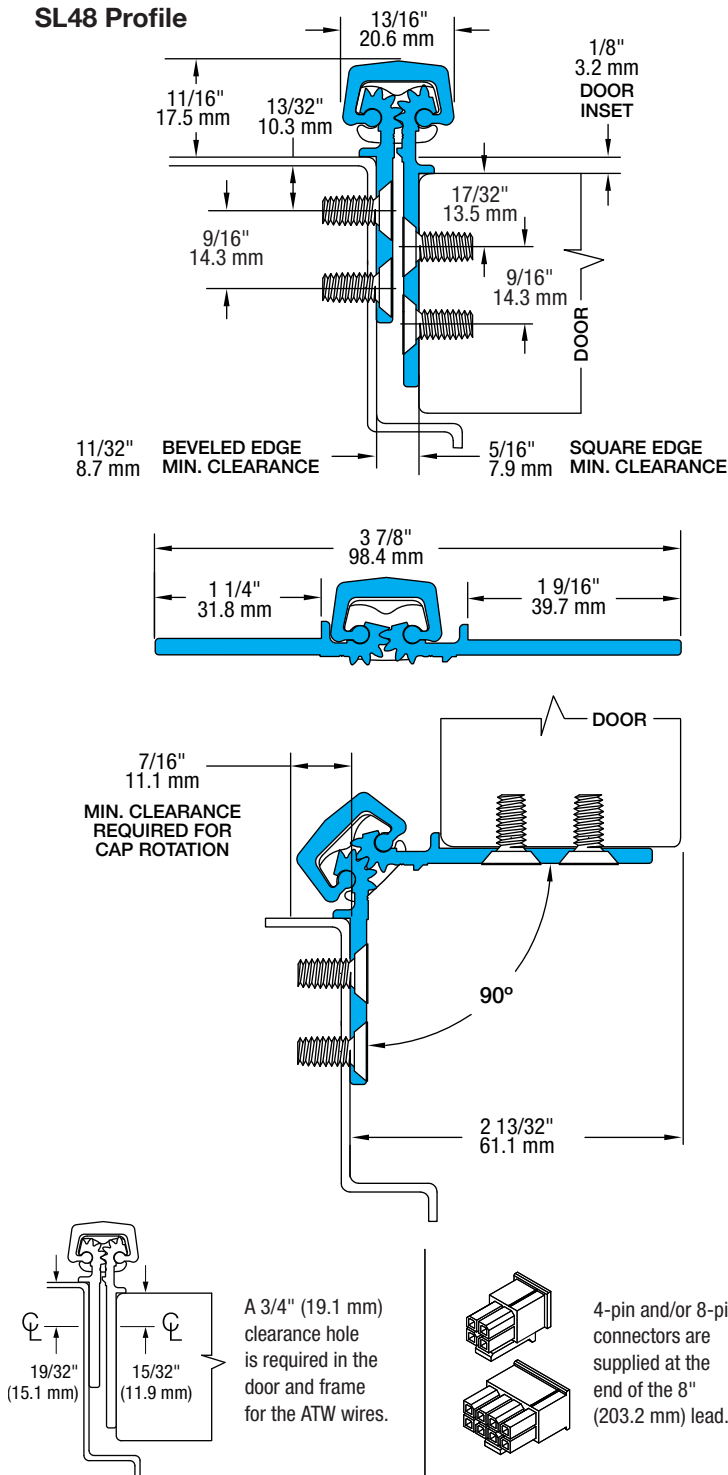

38 fasteners / 32 bearings

HOLES	ATW LOCATIONS
1 1/2 [38.1]	— 0 [0]
3 1/2 [88.9]	
5 1/2 [139.7]	
	— 8 3/16 [208.0]
10 [254.0]	
	— 13 5/16 [338.1]
	— 15 7/8 [403.2]
20 [508.0]	
	— 18 7/16 [468.3]
	— 23 9/16 [598.5]
	— 26 1/8 [663.6]
30 [762.0]	
	— 33 13/16 [858.8]
	— 36 3/8 [923.9]
	— 38 15/16 [989.0]
41 1/2 [1054.1]	
	— 44 1/16 [1119.2]
	— 46 5/8 [1184.3]
	— 49 3/16 [1249.4]
53 [1346.2]	
	— 56 7/8 [1444.6]
	— 59 7/16 [1509.7]
63 [1600.2]	
	— 64 9/16 [1639.9]
	— 67 1/8 [1705.0]
	— 69 11/16 [1770.1]
73 [1854.2]	
	— 74 13/16 [1900.2]
77 1/2 [1968.5]	
79 1/2 [2019.3]	
81 1/2 [2070.1]	
	— 83 [2108.2]