


SL84 85" HD600

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

NOTE: All unspecified angles default to 90°. To avoid an upcharge, 180° openings must be clearly specified at the time of order. There will be an upcharge for 180° ATW cover plates when ordered separately and finish (Clear, Bronze or Black) must be specified.

SL84 Profile

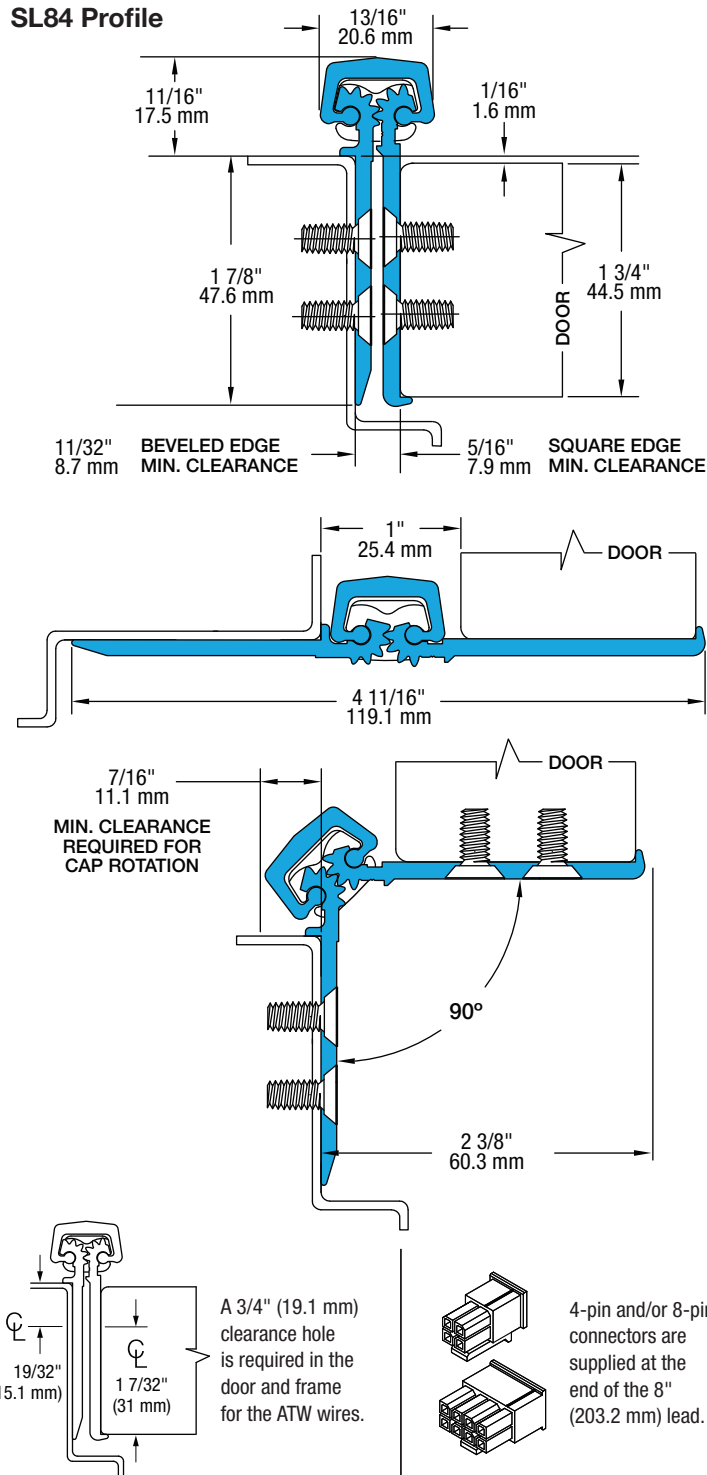

38 fasteners / 32 bearings

HOLES	ATW LOCATIONS
1 1/2 [38.1]	— 0 [0.0]
3 1/2 [88.9]	— 11 3/4 [298.5]
5 1/2 [139.7]	— 14 5/16 [363.5]
	— 16 7/8 [428.6]
10 [254.0]	— 22 [558.8]
	— 24 9/16 [623.9]
	— 27 1/8 [689.0]
20 [508.0]	— 32 1/4 [819.2]
	— 34 13/16 [884.2]
	— 37 3/8 [949.3]
	— 39 15/16 [1014.4]
30 [762.0]	— 45 1/16 [1144.6]
	— 47 5/8 [1209.7]
	— 50 3/16 [1274.8]
	— 52 3/4 [1339.9]
42 1/2 [1079.5]	— 57 7/8 [1470.0]
	— 60 7/16 [1535.1]
	— 63 [1600.2]
55 [1397.0]	— 68 1/8 [1730.4]
	— 70 11/16 [1795.5]
	— 73 1/4 [1860.6]
65 [1651.0]	
75 [1905.0]	
79 1/2 [2019.3]	
81 1/2 [2070.1]	
83 1/2 [2120.9]	
	— 85 [2159.0]